



**Priveznice za nošenje, povezivanje
i sigurnosni pojasi**
**Webbing and round slings,
ratchet tie downs, safety belts**

DOPUŠTENO OPTEREĆENJE za jedno-, dvo-, tro- i četverokrake priveznice

Working load limits for single, double, triple and multiple sling sockets



1 kraka		2 kraka Kut otklona β				3+4 kraka			
		0° - 45°		45° - 60°		0° - 45°		45° - 60°	
Direktno	Vezano	Direktno	Vezano	Direktno	Vezano	Direktno	Vezano	Direktno	Vezano
kg	kg	kg	kg	kg	kg	kg	kg	kg	kg
1,0	0,8	1,4	1,1	1,0	0,8	2,1	1,5		
1000	800	1400	1100	1000	800	2100	1500		
2000	1600	2800	2200	2000	1600	4200	3000		
3000	2400	4200	3300	3000	2400	6300	4500		
5000	4000	7000	5500	5000	4000	10500	7500		
6000	4800	8400	6600	6000	4800	12600	9000		
8000	6400	11200	8800	8000	6400	16800	12000		
10000	8000	14000	11000	10000	8000	21000	15000		
15000	12000	21000	16500	15000	12000	31500	22500		

PRITEGE S MEHANIZMOM EN 12195 - 2


Ratchet tie down EN 12195 - 2

Upozorenje:

Upotrebljavati samo neoštećene pritege. Pritege s mehanizmom ne smijete preopterećivati. Ne raditi čvorove na priveznici. Izbjegavati oštre rubove.

Warning:

Use only undamaged ratchet lashings. Ratchet lashing must not be overloaded. Do not tie knots on the ratchet lashing. Protect the ratchet lashing from sharp edges.

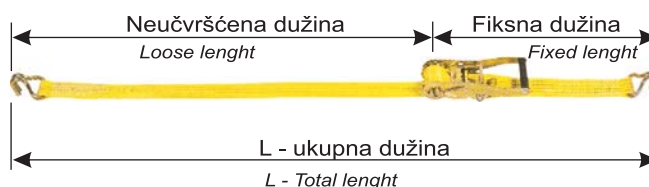

Model Model	Testno opterećenje Manufacturers proof force	Širina pritege Webbing width	Prekidna sila pritege Webbing Breaking Load	Nosivost pritege Lashing Capacity
	kg	mm	kg	kg
RTD25-040	800	25	1000	400
RTD25-050	1000	25	1200	500
RTD35-075	1500	35	1850	750
RTD35-100	2000	35	2500	1000
RTD35-150	3000	35	3750	1500
RTD50-200	4000	50	5000	2000
RTD50-250	5000	50	6250	2500
RTD75-350	7000	75	8750	3500
RTD100-500	10000	100	12500	5000



Veće nosivosti po narudžbi



Higher capacity per order

PRIVEZNICA BESKONAČNA EN 1492 - 2
Round slings EN 1942 - 2




Nosivost kg	Oznake u boji po nosivosti	Dopušteno opterećenje (kg) s jednim pojasom i omčom					Dopušteno opterećenje (kg) s dva pojasa i omčom			
		Jedno- stavno, direktno	Jedno- stavno, vezano	Jednostavno položen kut nagiba β			Direktan kut nagiba β		Vezan kut nagiba β	
				0°	0 - 45°	45 - 60°	0 - 45°	45 - 60°	0 - 45°	45 - 60°
1000	Ljubičasta	1000	0,8	2,0	1,4	1,0	0,7	0,5	1,12	0,8
2000	Zelena	2000	1600	4000	2800	2000	2800	2000	2400	1600
3000	Žuta	3000	2400	6000	4200	3000	4200	3000	3360	2400
4000	Siva	4000	3200	8000	5600	4000	5600	4000	4480	3200
5000	Crvena	5000	4000	10000	7000	5000	7000	5000	5600	4000
6000	Smeđa	6000	4800	12000	8400	6000	8400	6000	6720	4800
8000	Plava	8000	6400	16000	11200	8000	11200	8000	8960	6400
10000	Narančasta	10000	8000	20000	14000	10000	14000	10000	11200	8000

PRIVEZNICA BESKONAČNA

Materijal: poliester, najlon
 Stupanj sigurnosti: 6:1, 7:1, 8:1
 Norme: ISO4878, EN1492-2
 Dužina: po izboru
 Boja: u tablici nosivosti

ROUNDSLING

Material: Polyester, Nylon
 Safety factor: 6:1, 7:1, 8:1
 Standard: ISO4878, EN1492-2
 Length: As required
 Color: Color code

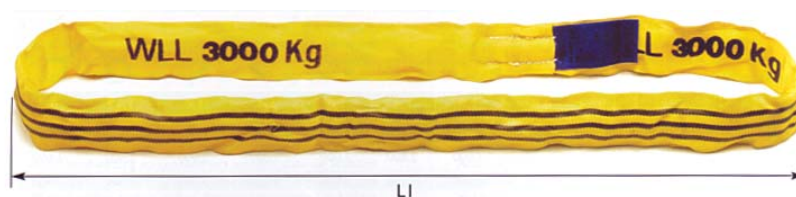

Veće nosivosti po narudžbi




Higher capacity per order



PRIVEZNICA BESKONAČNA EN 1492 - 2

Round sling EN 1492 - 2

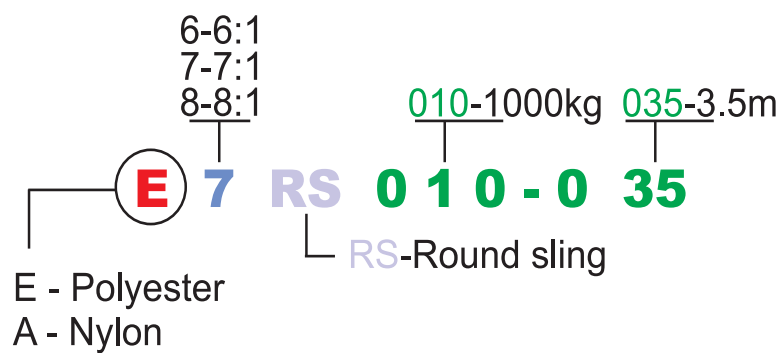

Priveznica beskonačna je za sve vrste dizanja jer je s obje strane jednako izdržljiva i ne oštećuje teret. Priveznica ima malu težinu i vrlo je fleksibilna. Rukovanje je jednostavno ako teret dižemo vodoravno ili okomito.

Roundsling is an all-purpose lifting sling, which is both, high strong and non-damaging to its' load. Extremely light in weight and infinitely flexible in all directions, it is easy and quick to manipulate even when awkwardly shaped or fragile loads are being lifted.

PRIVEZNICA ZA DIZANJE S OMČOM EN 1492 - 1

Webbing slings EN 1492 - 1

Najpopularniji model priveznica za dizanje je napravljen iz polyestera, nylona i polypropylena. Stupanj sigurnosti je različit i kreće se od 5:1 do 8:1. Napravljene su po normi ISO 4878, EN 1492-1, s certifikatom kao što je GS i CE. Nudimo različite dužine priveznica, različitih dopuštenih opterećenja.

This is the most popular webbing sling, made from Polyester, Nylon and Polypropylene. The safety factor is available from 5:1 to 8:1. Products are made according to ISO4878, EN 1492-1 with certificates as GS and CE.



Nosivost kg	Oznake u boji po nosivosti	Jedno- stavno, direktno	Jedno- stavno, vezano	Dopušteno opterećenje (kg) s jednim pojasom i omčom			Dopušteno opterećenje (kg) s dva pojasa i omčom			
				Jednostavno položen kut nagiba β			Direktan kut nagiba β		Vezan kut nagiba β	
				0°	0 - 45°	45 - 60°	0 - 45°	45 - 60°	0 - 45°	45 - 60°
		1,0	0,8	2,0	1,4	1,0	1,4	1,0	1,12	0,8
1000	Ljubičasta	1000	800	2000	1400	1000	1400	1000	1120	800
2000	Zelena	2000	1600	4000	2800	2000	2800	2000	2400	1600
3000	Žuta	3000	2400	6000	4200	3000	4200	3000	3360	2400
4000	Siva	4000	3200	8000	5600	4000	5600	4000	4480	3200
5000	Crvena	5000	4000	10000	7000	5000	7000	5000	5600	4000
6000	Smeđa	6000	4800	12000	8400	6000	8400	6000	6720	4800
8000	Plava	8000	6400	16000	11200	8000	11200	8000	8960	6400
10000	Narančasta	10000	8000	20000	14000	10000	14000	10000	11200	8000



Upozorenje: Priveznice za dizanje s mehanizmom može upotrebljavati osoba koja je za to osposobljena. Prije upotrebe provjeriti da li je priveznica sigurna za upotrebu. Pazite na oštre rubove, malene kutove i druge dijelove koji mogu oštetiti priveznicu. Ne dižite veće terete od dopuštenog opterećenja priveznice. Priveznice nemojte vezati u čvor.

Warning: Use only if train. Inspect the sling is not damaged before use. Protect sling from sharp edges of load. Do not attempt to use sling above rated lifting capacity. Do not knot the sling.



Veće nosivosti po narudžbi



Higher capacity per order